

K6 Chiller



- 6.0kW Cooling Capacity (@17°C set point)
- Versatile design, allowing for many standard and non standard options
- Totally reliable workhorse

Chiller Specification



Dimensions L x W x H	775 x 510 x 850 mm
Cooling capacity (water @ 17°C)	6000 watts
Digital temperature display	Dual readouts standard (set point and indicated temperature)
Temperature adjustable	1°C increments
Temperature stability	+/- 0.1°C
Temperature range	+4°C to +35°C
Extended temperature range - Optional	-30°C to +80°C
Microprocessor 3 term PID temperature controller.	Easy front panel programming, with auto tune, fuzzy logic, for state-of-the art control accuracy.
Temperature alarm - Standard off-set +/- 10°C	Adjustable High / Low
Low fluid level alarm	Standard - Visual with pump interlock
Auto diagnostic functions	Controller and sensor
System volume	7 litres
Pressure control system	Standard fitment internal - user adjustable between 20 and 150psi
Compatible fluids	Hexid fluids / water / propylene glycol
Fluid connections	BSP threaded Male 3/4", Female 1/2", 3/8" and 1/2" barbs also supplied
Compressor over - load protection	Standard
Emergency Off (EMO)	Via main circuit breaker (MCB)
Tool-less access	No
Noise level	68 dB(A) @ 1 metre
Weight (approximated – Varies with options)	125kg
Wheels for mobility	Standard (2 locking)
Power requirements	12 Amps 230VAC 1ph 50/60 Hz or 5 Amps 415VAC 3ph 50/60Hz
Warranty	2 years parts, one year labour. Optional 3 year comprehensive

Standard options

CAT NO	DESCRIPTION	USE
SA00006	Water cooled	To isolate application from house water supply, reduces possibility of contamination and allows improved temperature control
SA00001	Remote alarm pack	To monitor the performance of a chiller some distance from the application
SA00008	Non return / solenoid option	To prevent siphoning in high pressure applications or when chiller and application are sited at different levels
SA00002	Low temperature pack	For applications that require temperatures below 4°C but above -15°C
SA00003	Heater pack	For applications that require temperatures above 35°C up to 70°C
SA00010	Low flow alarm	Visual
SA00011	RS 232 / 485	Communication and software pack to allow monitoring and logging of chiller performance
SA00013	In-line deioniser	For applications that require deionised water in the recirculating loop
SA00016	Quick release self sealing connector pack	Fast and clean method of changing out a chiller
SA00018	Stainless Steel pump and fittings	When used with deionised water
SA00017	Installation Kit	

Pump Options K6 Chiller - Other pumps can be specified if required.

PUMP	TYPE	FLOW L/MIN	MAX PRESSURE PSI / BAR	MATERIAL
P5	Positive displacement impellor	5	150 (10)	Brass or Stainless Steel (304)
P10	Positive displacement impellor	10	150 (10)	Brass or Stainless Steel (304)
P17	Positive displacement impellor	17	150 (10)	Brass or Stainless Steel (304)
P8	Magnetically coupled rotary vane	8	150 (10)	Stainless Steel (304)
P20	Multistage centrifugal	0-20	26 (1.8)	PPS

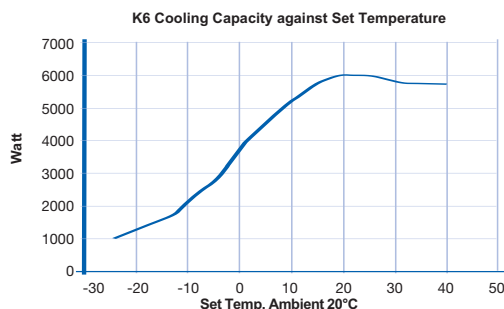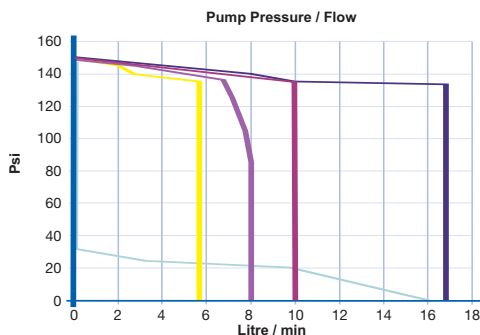

ATC

K6 - Compact, High Capacity 6.0 kW Chiller

Cool Support

- Unrivalled 3 year warranty support available
- 24 hour swap out support service available
- UK factory, European and regional US service support centres

Cool Savings

- Lowest Cost of ownership - Fastest Pay-back
 - 100% water savings
 - No sewage-waste costs
 - Ultimate equipment Up-time
 - Power efficient

Cool Solutions

- Smallest foot-print per kW
- State-of-the-art Dual-display microprocessor PID controller (set-point + actual) $\pm 0.1^{\circ}\text{C}$
- Ultra-low vibration series
- Whisper-Quiet series
- Widest choice of options
- Build to ISO 9002 CE Standards

*'Outstanding re-circulating
chiller performance,
reliability and support'*



*Cool
Reliability*